

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 354 782 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.10.2003 Bulletin 2003/43

(51) Int Cl.7: **B62D 1/19, B62D 1/184**

(21) Application number: **03015825.7**

(22) Date of filing: **09.03.1998**

(84) Designated Contracting States:
DE FR GB IT

(72) Inventor: **Takabatake, Yoshikazu**
Chuo-Ku, Osaka 542-8502 (JP)

(30) Priority: **14.03.1997 JP 8194797**

(74) Representative: **Hering, Hartmut, Dipl.-Ing.**
Patentanwälte
Berendt, Leyh & Hering
Innere Wiener Strasse 20
81667 München (DE)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
98104171.8 / 0 864 481

(71) Applicant: **KOYO SEIKO CO., LTD.**
Osaka-shi, Osaka 542-8502 (JP)

Remarks:


This application was filed on 10 - 07 - 2003 as a
divisional application to the application mentioned
under INID code 62.

(54) **Shock absorbing steering device**

(57) This is a shock absorbing steering device that
provides the benefit of stable shock absorption in the
event of a vehicle collision. A pair of connecting mem-
bers (33a, 33b) connected through guide sections (30a",
30b") to a column (2a) that supports a steering shaft (5)

is connected to a vehicle member (18). This column (2a)
is relatively movable in its axial direction with respect to
the connecting members (33a, 33b) when force above
a given level acts on the column (2a) along the axial di-
rection. This column (2a) is arranged between the two
connecting members (33a, 33b).

Fig. 1

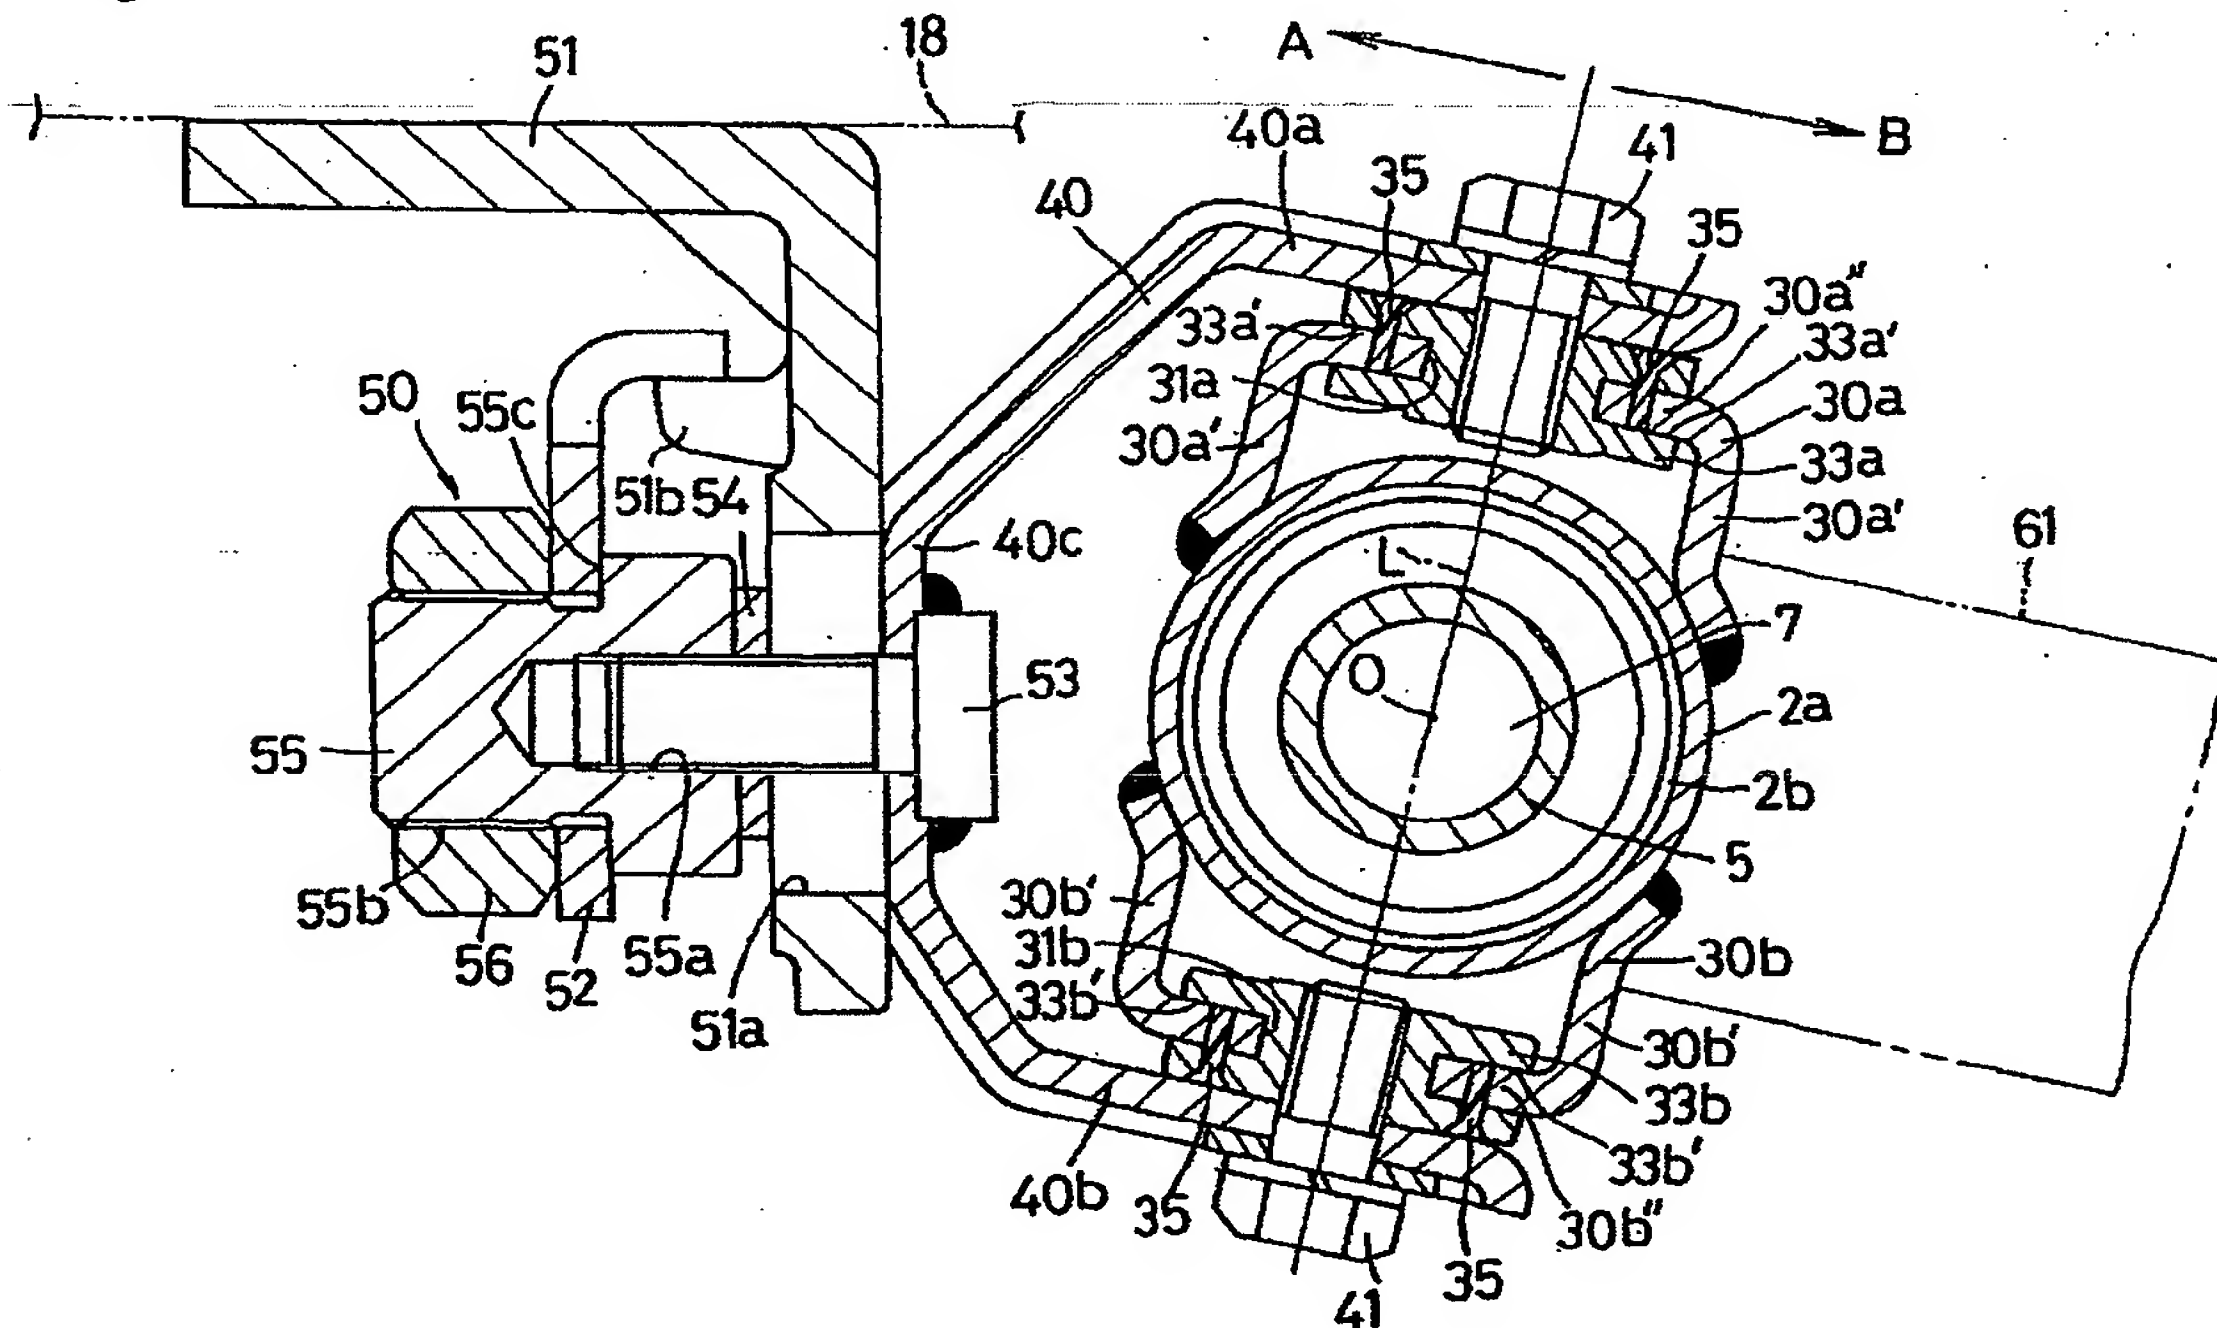

Description

[0001] The present invention relates to a shock absorbing steering device used to absorb shock that would act on the driver in the event of a vehicle collision as set out in the preamble of claim 1.

[0002] A shock absorbing steering device of the kind referred to above is disclosed in US-A-4,241,937.

[0003] For example, in the shock absorbing steering device that is disclosed in Early Japanese Patent Publication No. H8-150944 and No. H7-17411, there are provided a column that supports a steering shaft, and a pair of connecting members connected through a guide section to this column. Each connecting member is connected to the vehicle body. This column is made relatively movable along its axial direction with respect to the connecting members, when force above a given amount acts on the column along the axial direction. If therefore shock acts in the axial direction of the column due to a collision, the shock that would act on the driver is absorbed by the relative movement of this column with respect to the connecting members.

[0004] In a conventional shock absorbing steering device as described above, the column is positioned away from the space between the two connecting members in the radial direction of the column, so there is a dead space between the two connecting members. This creates the problem that the layout of other equipments is restricted in a vehicle interior where space is limited.

[0005] Also, in the above conventional shock absorbing steering device, it is difficult to transmit the force; acting on the column in the event of a collision to both connecting members uniformly, so smooth relative movement of the column with respect to the two connecting members is obstructed.

[0006] Also, it is desired that a housing of a locking member, that is capable of locking rotation of the steering shaft to prevent theft, is provided on this column. In the prior art arrangement, when the column is relatively moved with respect to the connecting members, interference between this housing and the connecting members should be prevented. Accordingly, it is necessary to make the distance between this housing and the connecting members large. However, in a vehicle interior in which space is limited, it is difficult to make the distance between the housing and the connecting members large.

[0007] An object of the present invention is to provide a shock absorbing steering device that is capable of solving the above technical problems.

[0008] According to the present invention there is provided a shock absorbing steering device as set out in the single claim.

[0009] According to the constitution of the present invention and the arrangement of the guide members and the connection of the support member, the tilting angle of the steering wheel may be adjusted respectively.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

Fig. 1 is a cross-sectional view of major parts of a shock absorbing steering device according to an embodiment of the present invention.

Fig. 2 is a plan view of major parts of the shock absorbing steering device according to the embodiment of the present invention.

Fig. 3 is a partially broken away plan view of the shock absorbing steering device according to the embodiment of the present invention.

Fig. 4 is a side view of the shock absorbing steering device according to the embodiment of the present invention.

Fig. 5 is a partially sectioned view of the shock absorbing steering device according to the embodiment of the present invention.

Fig. 6 is a view for explanation of the action of the shock absorbing steering device according to the embodiment of the present invention.

[0011] An embodiment of the present invention is described below with reference to the drawings.

[0012] A shock absorbing power steering device 1 shown in Figs. 3, 4 and 5 comprises a cylindrical first column 2a and a cylindrical second column 2b. One end of the second column 2b is pressed into the first column 2a. By this arrangement, if a force above a given amount exceeding this pressing-in force acts on the first column 2a along the axial direction of the column 2a in the event of a vehicle collision, this first column 2a can be relatively moved in its axial direction with respect to the second column 2b.

[0013] The first column 2a supports a tubular first steering shaft 5 through a bearing 4. A steering wheel 6 is connected to one end of the first steering shaft 5. One end of the second steering shaft 7 is inserted into the other end of the first steering shaft 5 so that rotation can be transmitted between these shafts 5, 7. For example, by making the inner circumference of the first steering shaft 5 and the outer circumference of the second steering shaft 7 non-circular, rotation can be transmitted from the first steering shaft 5 to the second steering shaft 7.

[0014] The outer race of the bearing 4 engages with a step on the inner circumference of the first column 2a, and the inner race engages with a stop ring 5a mounted on the outer circumference of the first steering shaft 5. Thus, in the event of the vehicle collision, force can be transmitted from the steering wheel 6 through the first steering shaft 5 and bearing 4 to the first column 2a along the axial direction of the column 2a. A circumferential groove 8 is formed in the outer circumference of the second steering shaft 7. A through-hole 9 communicating with the circumferential groove 8 is formed in the first steering shaft 5. The through-hole 9 and circum-

ferential groove 8 are filled with resin 10. By this arrangement, in the event of the vehicle collision, if force more than a given amount acts on the first steering shaft 5 along the axial direction of the shaft 5, the resin 10 is sheared. By the breakage of the resin 10, the first steering shaft 5 can be relatively movable along its axial direction with respect to the second steering shaft 7.

[0015] The other end of the second column 2b is integrated with a sensor housing 15a of a torque sensor 15 for detection of steering torque. Rotation of the second steering shaft 7 is transmitted to a third steering shaft 12 through the torque sensor 15. The rotation of the third steering shaft 12 is transmitted to the vehicle wheels through for example a known steering gear of rack and pinion type or ball screw type. By a steering assistance motor 13 mounted on the sensor housing 15a, steering assistance force corresponding to the steering torque detected by the torque sensor 15 is provided. Known devices can be employed as the torque sensor 15 and the steering assistance mechanism.

[0016] A support frame 17 mounted on the sensor housing 15a by means of bolts 16 is supported by means of a pair of lower support brackets 19a, 19b so as to be capable of tilting about a tilting shaft 20 that is arranged along the left/right direction of the vehicle body. The brackets 19a, 19b are mounted by means of bolts (not shown in the drawings) on the vehicle body member 18.

[0017] As shown in Fig. 1 and Fig. 2, a pair of guide members 30a, 30b are united by welding with the circumference of the first column 2a. Each of the guide members 30a, 30b has a pair of feet 30a', 30b' and a guide section 30a'', 30b''. The feet 30a', 30b' project to the outside from the outer circumference of the first column 2a. Each of the guide sections 30a'', 30b'' is integrated with the feet 30a' or 30b' at the position separated from the outer circumference of the first column 2a. Each of the guide sections 30a'', 30b'' has a guide groove 31a or 31b running along the axial direction of the first column 2a. Each of the guide grooves 31a, 31b is closed at one end adjacent to the steering wheel, and is open at the other end adjacent to the vehicle wheel.

[0018] A pair of connecting members 33a, 33b are connected to the first column 2a through the guide sections 30a'', 30b''. Specifically, a pair of recesses 33a', 33b' are formed on each of the connecting members 33a, 33b along the axial direction of the first column 2a. Each of the guide sections 30a'', 30b'' is pressed into the recesses 33a' or 33b' along the axial direction of the first column 2a. Plural through-holes are formed in each of the guide sections 30a'', 30b''. Other through-holes communicating with the through-holes are formed in each of the connecting members 33a, 33b, and these through-holes are filled with resin 35. By this arrangement, the resin 35 is sheared, when force above a given amount exceeding the force for pressing the guide sections 30a'', 30b'' into the recesses 33a', 33b' acts on the first column 2a along the axial direction, with the result

that the first column 2a is relatively movable along its axial direction with respect to the connecting members 33a, 33b.

[0019] As shown in Fig. 1, the first column 2a is arranged between the two connecting members 33a, 33b. These connecting members 33a, 33b are arranged on a line L perpendicular to the axis O of the first column 2a. The distance from this axis O to one connecting member 33a is equal to the distance from this axis O to the other connecting member 33b.

[0020] The connecting members 33a, 33b are connected to a vehicle body member 18 through a support member 40 that radially extends in one direction (direction indicated by the arrow A in Fig. 1) from the outer periphery of the first column 2a. In more detail, this support member 40 comprises a first support section 40a connected to one connecting member 33a, a second support section 40b connected to the other connecting member 33b, and a joining section 40c that joins both support sections 40a, 40b. Each of the connecting members 33a, 33b is connected to the support member 40 by means of bolts 41.

[0021] The support member 40 is connected to the vehicle body member 18 through a tilting angle adjustment mechanism 50. Specifically, as shown in Fig. 1, Fig. 3 and Fig. 4, this tilting angle adjustment mechanism 50 comprises an operating lever 52 and an upper support bracket 51 connected to the vehicle body member 18 by means of bolts (not shown in the drawings). A support bolt 53 inserted into the support member 40 is inserted into a slot 51a formed in the upper support bracket 51. The head of the support bolt 53 is welded to the support member 40. A female thread 55a formed on a lever hub 55 is screwed on to the support bolt 53. The operating lever 52, that is fitted to the outer circumference of the hub 55 so as to rotate together with the hub 55, is clamped by a nut 56 screwed on to a male thread 55b formed on the outer circumference of the hub 55 and a step 55c formed on the outer circumference of the hub 55. When the operating lever 52 is tilted to the position shown by the double-dotted chain line in Fig. 4, the screw-threaded relationship of the support bolt 53 and hub 55 is slackened. Movement of the support bolt 53 within the slot 51a along an arc centered on the tilting shaft 20 is thereby permitted. The tilting angle of the steering wheel 6 can be adjusted by means of this movement. When the operating lever 52 is tilted to its original position, the hub 55 that is screwed on to the support bolt 53 is pushed on to the upper support bracket 51 through a washer 54, and the support bolt 53 is thereby fixed. A stopper 51b for the operating lever 52 is formed on the upper support bracket 51 in order to prevent the support bolt 53 being screwed in excessively.

[0022] As shown in Fig. 3, a housing 61 of a locking device 60 is provided on the outer circumference of the first column 2a. A locking member 63 is housed in the housing 61. The housing 61 radially extends in the other direction (direction indicated by the arrow B in Fig. 1)

from the outer circumference of the first column 2a. The locking member 63 projects from the housing 61 on lock operation by means of a key (not shown in the drawings), and is retracted into the housing 61 on unlocking operation. A known locking mechanism can be employed to move the locking member 63 in response to the key operation. Rotation of the first steering shaft 5 is locked when the locking member 63 projecting from the housing 61 is inserted into a recess 62a formed on a tubular member 62 that is fixed to the outer circumference of the first steering shaft 5. If torque is generated to rotate the steering wheel 6 in a condition wherein rotation of the first steering shaft 5 is locked by means of the locking member 63, the torque is received by the vehicle body member 18 through the guide members 30a, 30b.

[0023] According to the constitution described above, by a collision between the vehicle and an obstacle existing in front of the vehicle, the resin 10 that connects the first steering shaft 5 to the second steering shaft 7 is sheared, the resin 35 that connects the connecting members 33a, 33b to the guide sections 30a", 30b" is sheared, and the connecting members 33a, 33b are moved relatively to the guide sections 30a", 30b", thereby, as shown in Fig. 6, the first column 2a moves in its axial direction relative to the connecting members 33a, 33b and the second column 2b. Impact energy can be absorbed by the shearing of the resin and by the friction between the relatively moving members. During the relative movement, the guide sections 30a", 30b" and connecting members 33a, 33b are maintained in engaged condition, and the position of their engagement is varied as the first column 2a moves relatively with respect to the connecting member 33a, 33b and second column 2b. The absorption characteristic of the impact energy is therefore stable since there is no possibility of the first column 2a becoming detached from the vehicle body member 18.

[0024] According to the above constitution, because the first column 2a is arranged between the two connecting members 33a, 33b, the space between the two connecting members 33a, 33b can be effectively utilized. By this arrangement, restriction of the layout of other equipments within the vehicle body can be avoided. Also, the two connecting members 33a and 33b are arranged on a line L perpendicular to the axis O of the first column 2a, and the distance from the axis O to one connecting member 33a and the distance from the axis O to the other connecting member 33b are made equal, thereby the force acting on the first column 2a in the event of a collision is uniformly transmitted to both connecting members 33a, 33b. Therefore, the first column 2a can be relatively moved in a smooth manner with respect to the two connecting members 33a, 33b, so the impact energy absorption characteristic is stabilized. There is no possibility of the housing 61 of the locking member 63 interfering with the connecting members 33a, 33b when the first column 2a is moved relatively

with respect to the connecting members 33a, 33b, so there is no need to make the distance between the housing 61 and the connecting members 33a, 33b large. This device 1 can therefore be made of small size.

[0025] It should be noted that the present invention is not restricted to the embodiments described above. For example, the impact absorption effect can be adjusted by gradually varying the width of the guide grooves 31a, 31b along the axial direction of the first column 2a as shown by the double-dotted chain line in Fig. 2, or by gradually varying the thickness of the guide sections 30a", 30b" along the axial direction of the first, column 2a. Also, the tilting angle adjustment mechanism can be dispensed with so that the support member 40 is directly connected to the vehicle body member 18.

Claims

1. A shock absorbing steering device comprising:

- a) a column (2a) that supports a steering shaft (5) and a steering wheel (6), the column (2a) having an axis and an outer circumference;
- b) a pair of guide members (30a, 30b) having:

- 1) respective guide sections (30a", 30b"); and
- 2) respective pairs of feet (30a', 30b') that project outward from the outer circumference of the column (2a);

- c) a support member (40) adapted to be connected to a vehicle body member (18) through a tilt adjustment mechanism (50) for adjusting a tilting angle of the steering wheel (16); and
- d) a pair of connecting members (33a, 33b) that are connected to the support member (40) and between which said column (2a) is arranged, each of the connecting members (33a, 33b) having a pair of recesses;

characterized in that

- 1) each of the guide sections (30a", 30b") is pressed into the recesses (33a', 33b') along an axial direction of the column (2a) so that impact energy is absorbed by friction between the guide sections (30a", 30b") and the connecting members (33a, 33b); and
- 2) said column (2a) is relatively movable along its axial direction with respect to said connecting members (33a, 33b), when a force more than a predetermined amount acts on the column (2a) along the axial direction, a direction of said force along the axis of the column (2a) relative to said guide members (30a, 30b) remaining constant regardless of change of the tilting angle.

Fig.1

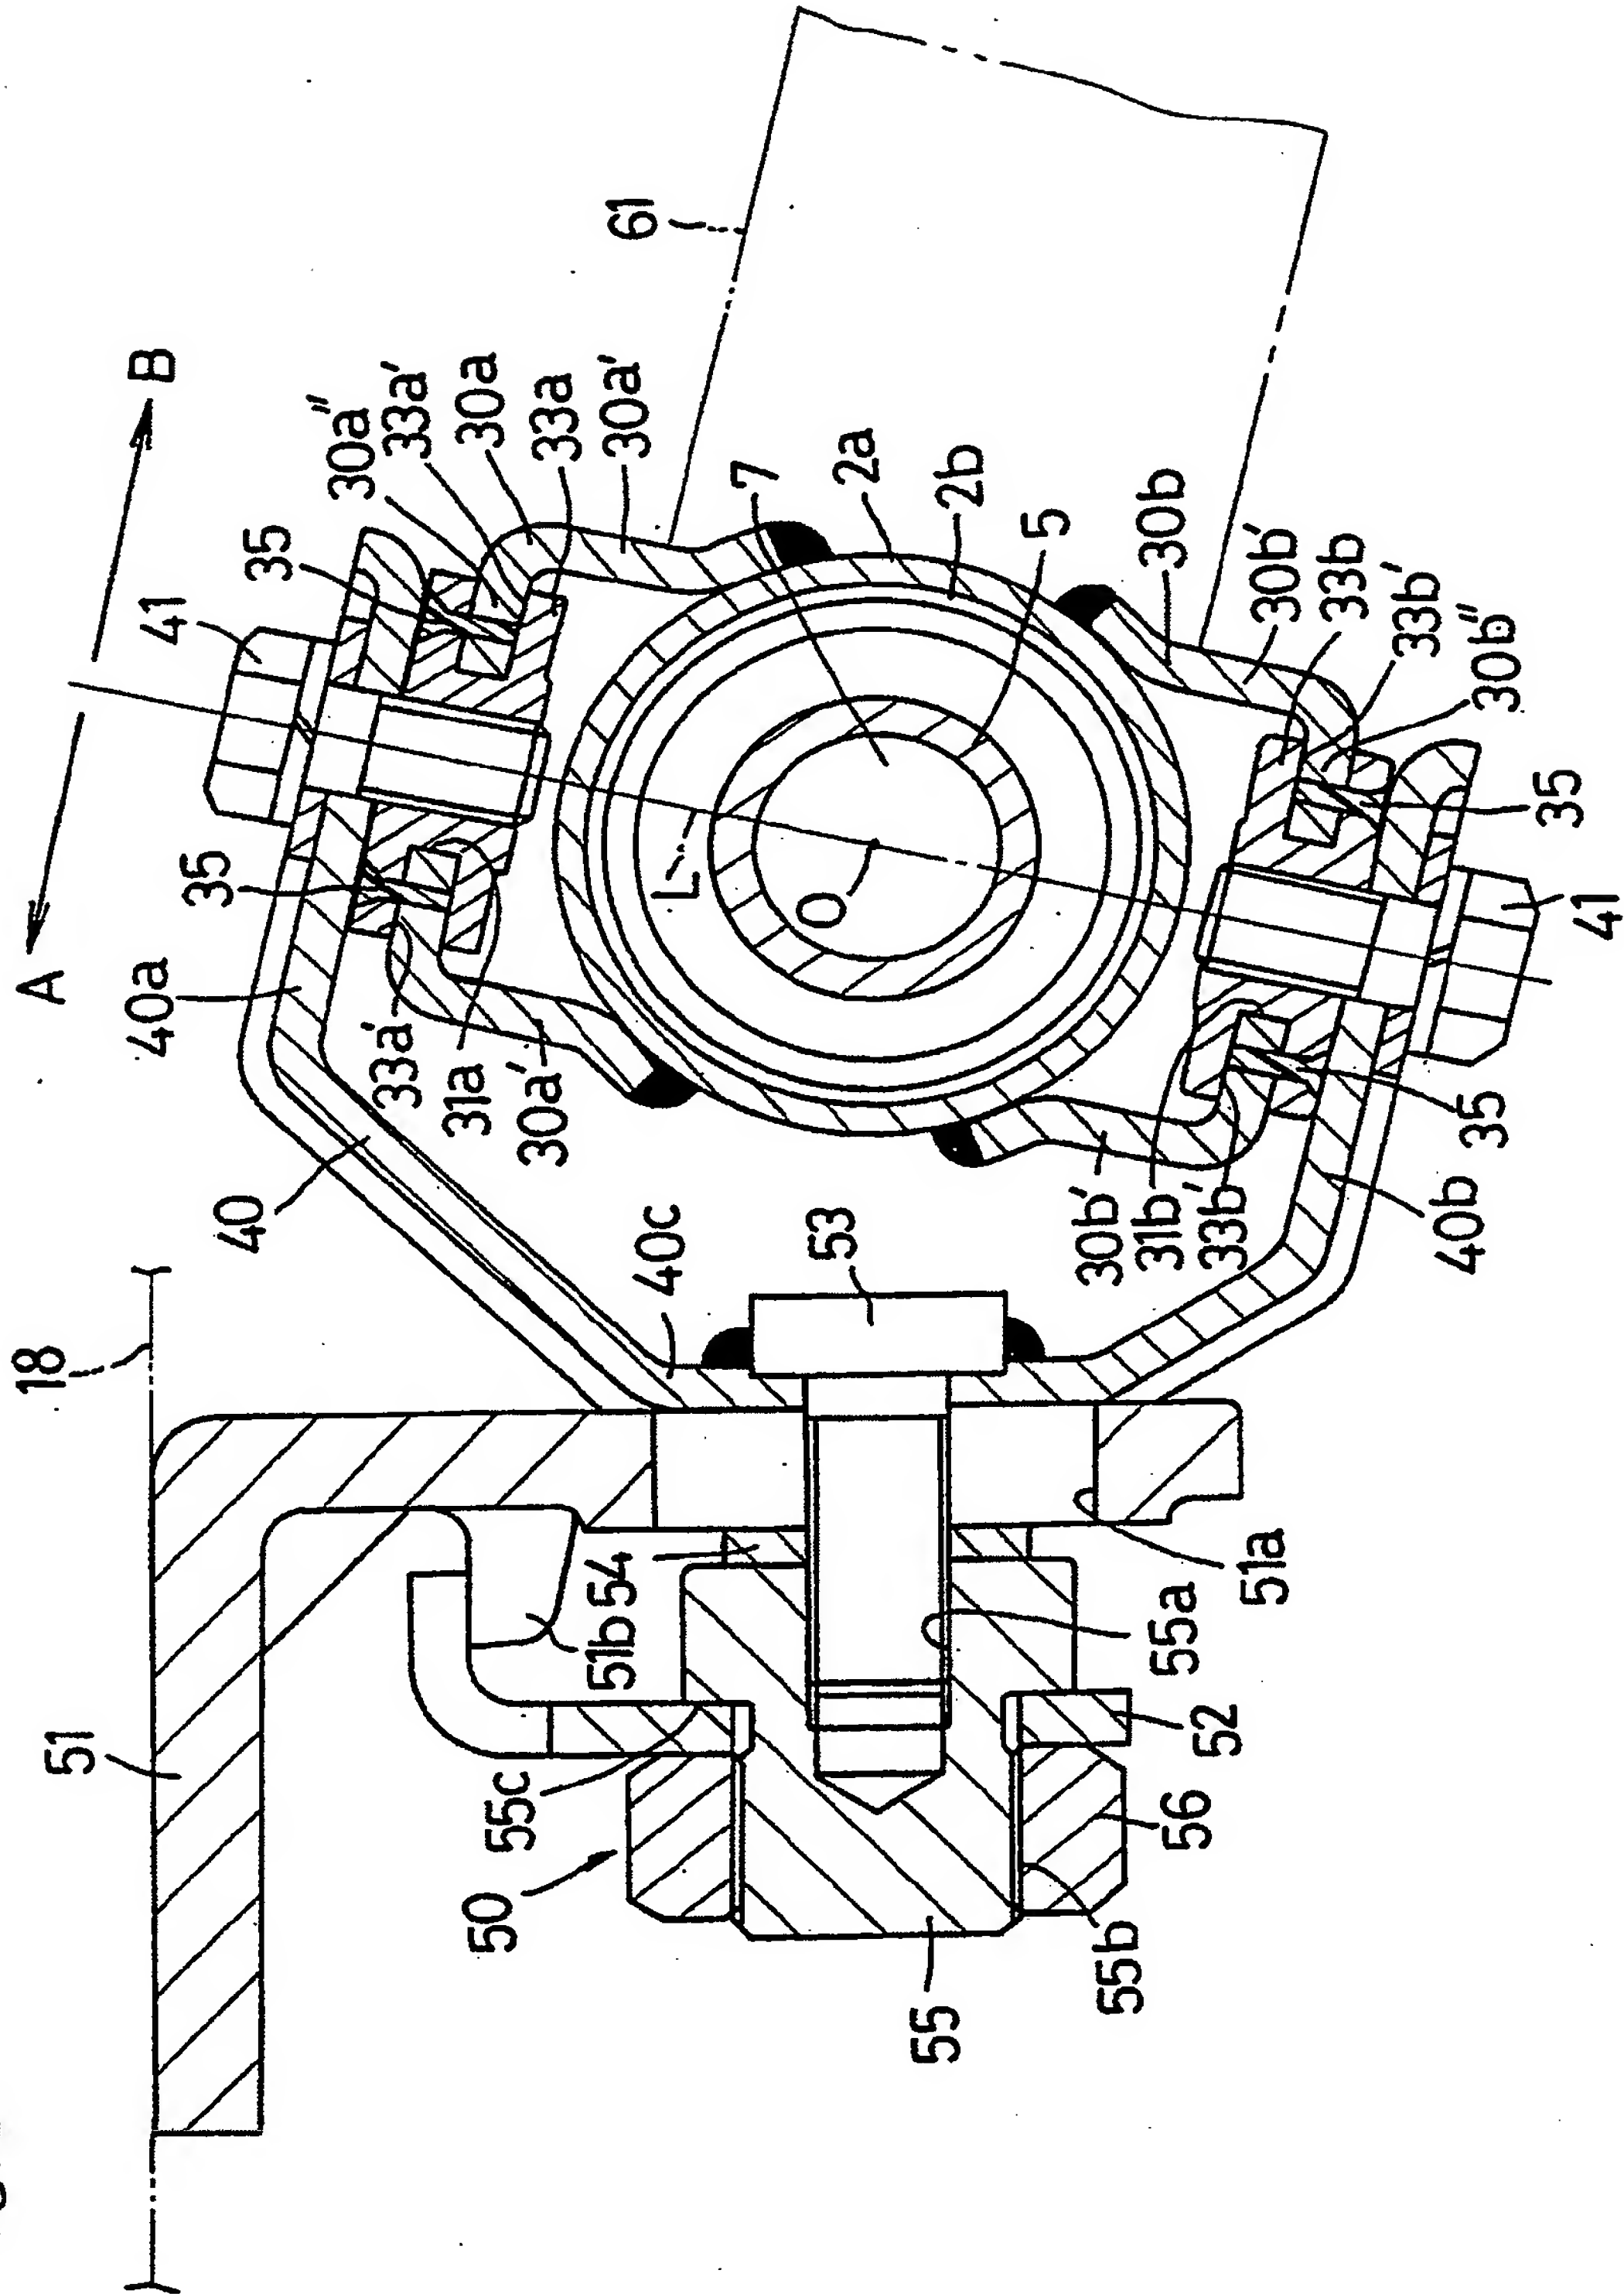


Fig. 2

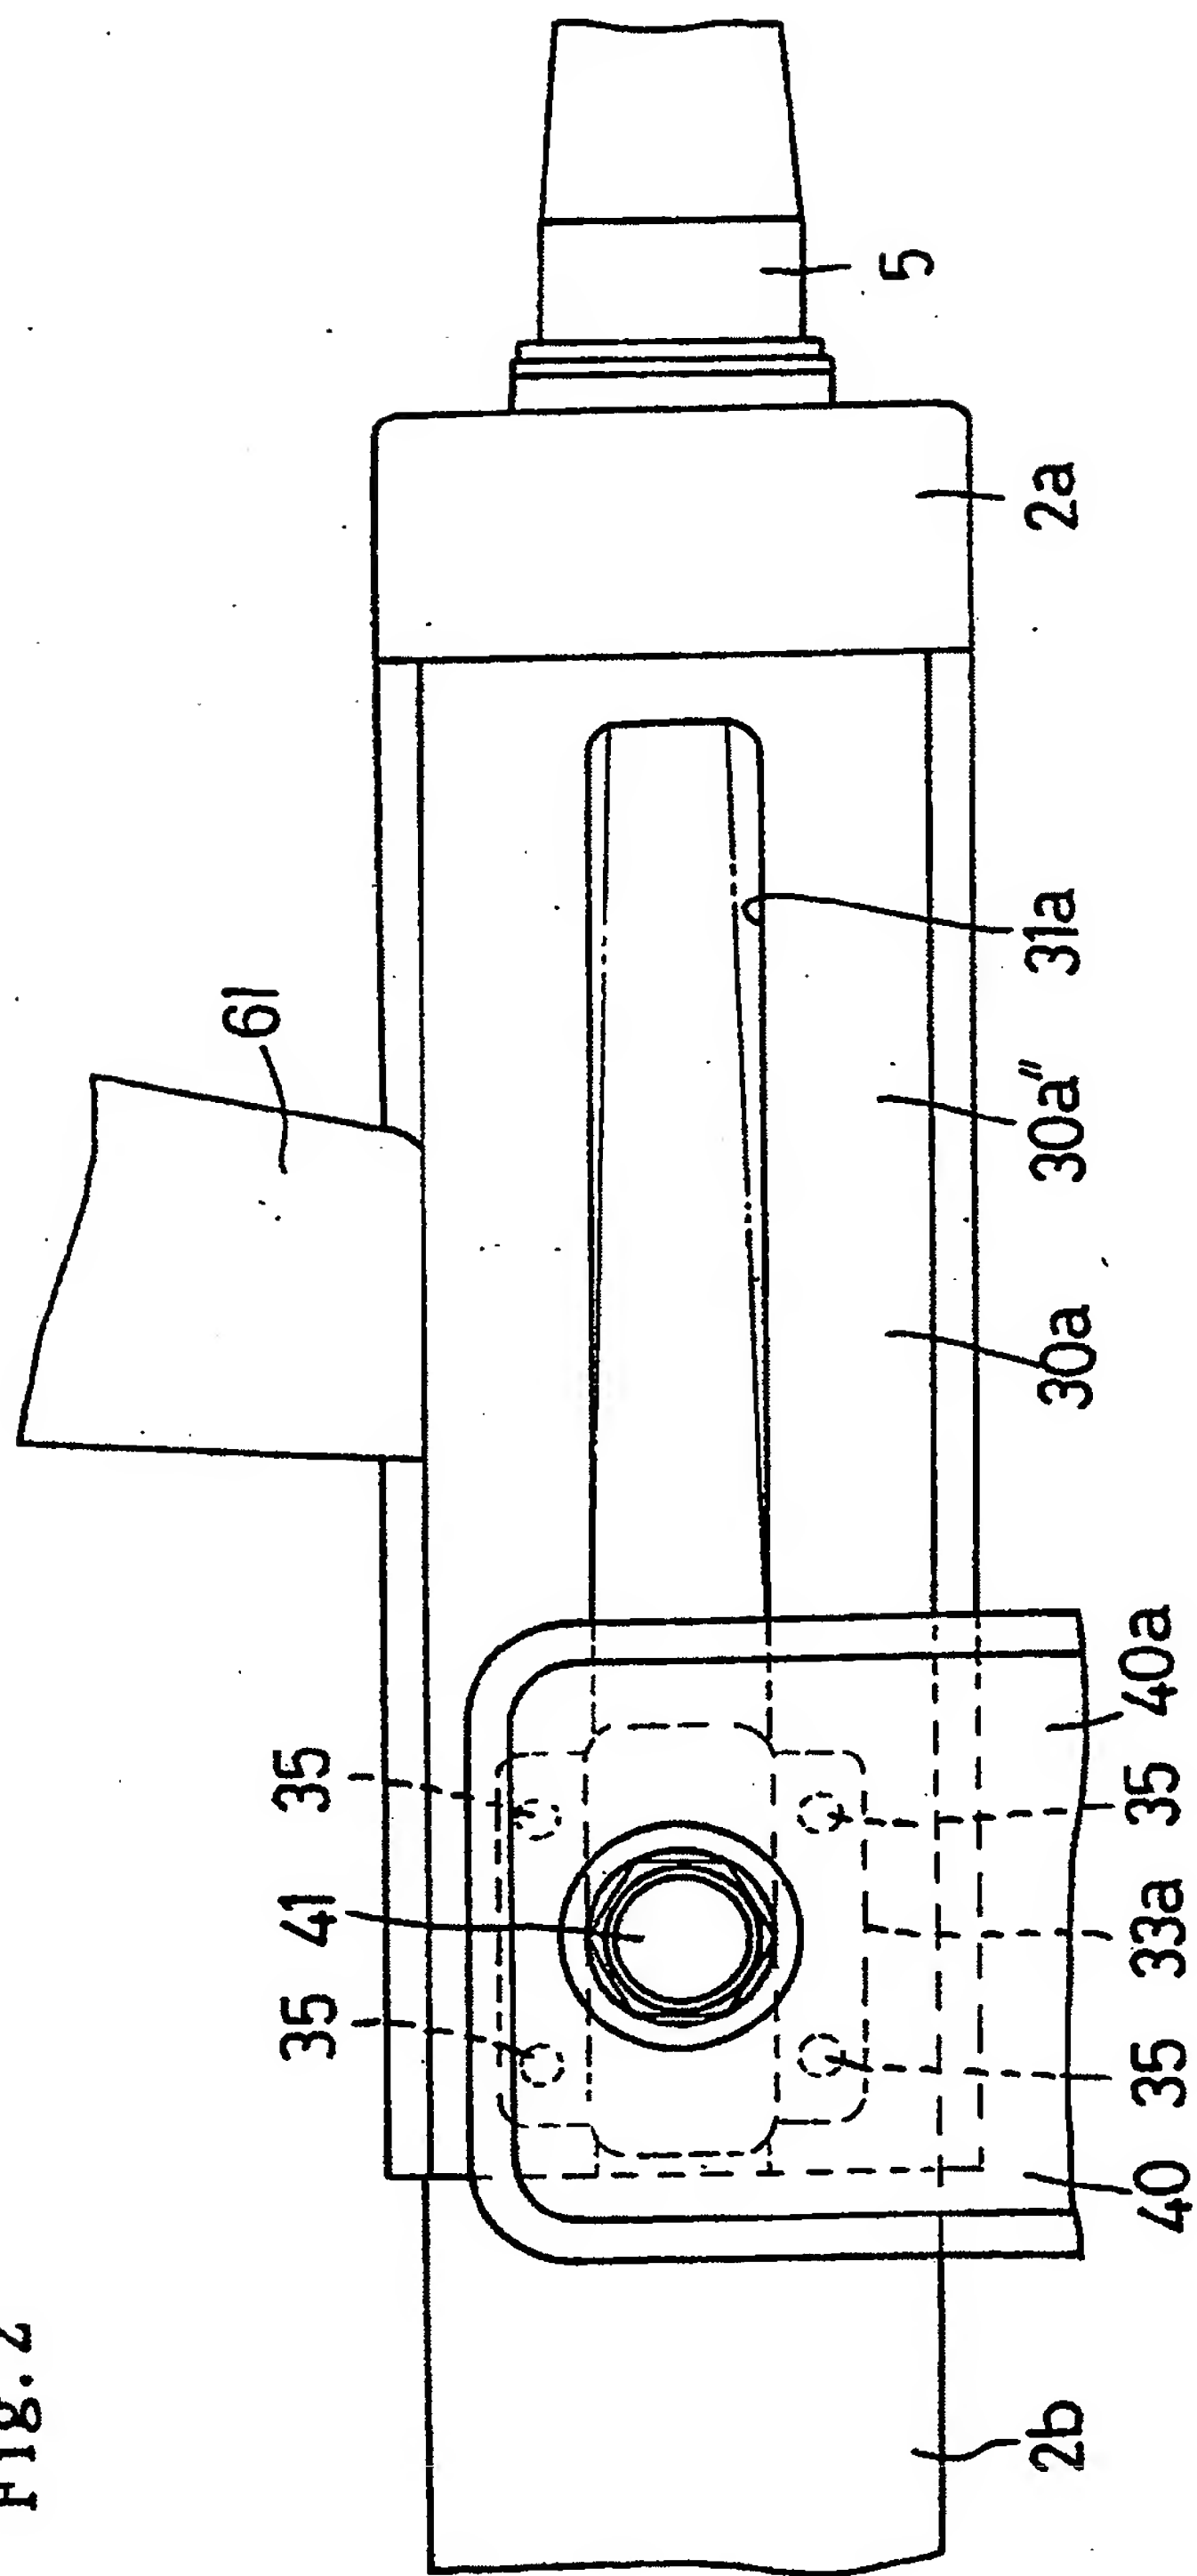


Fig. 3

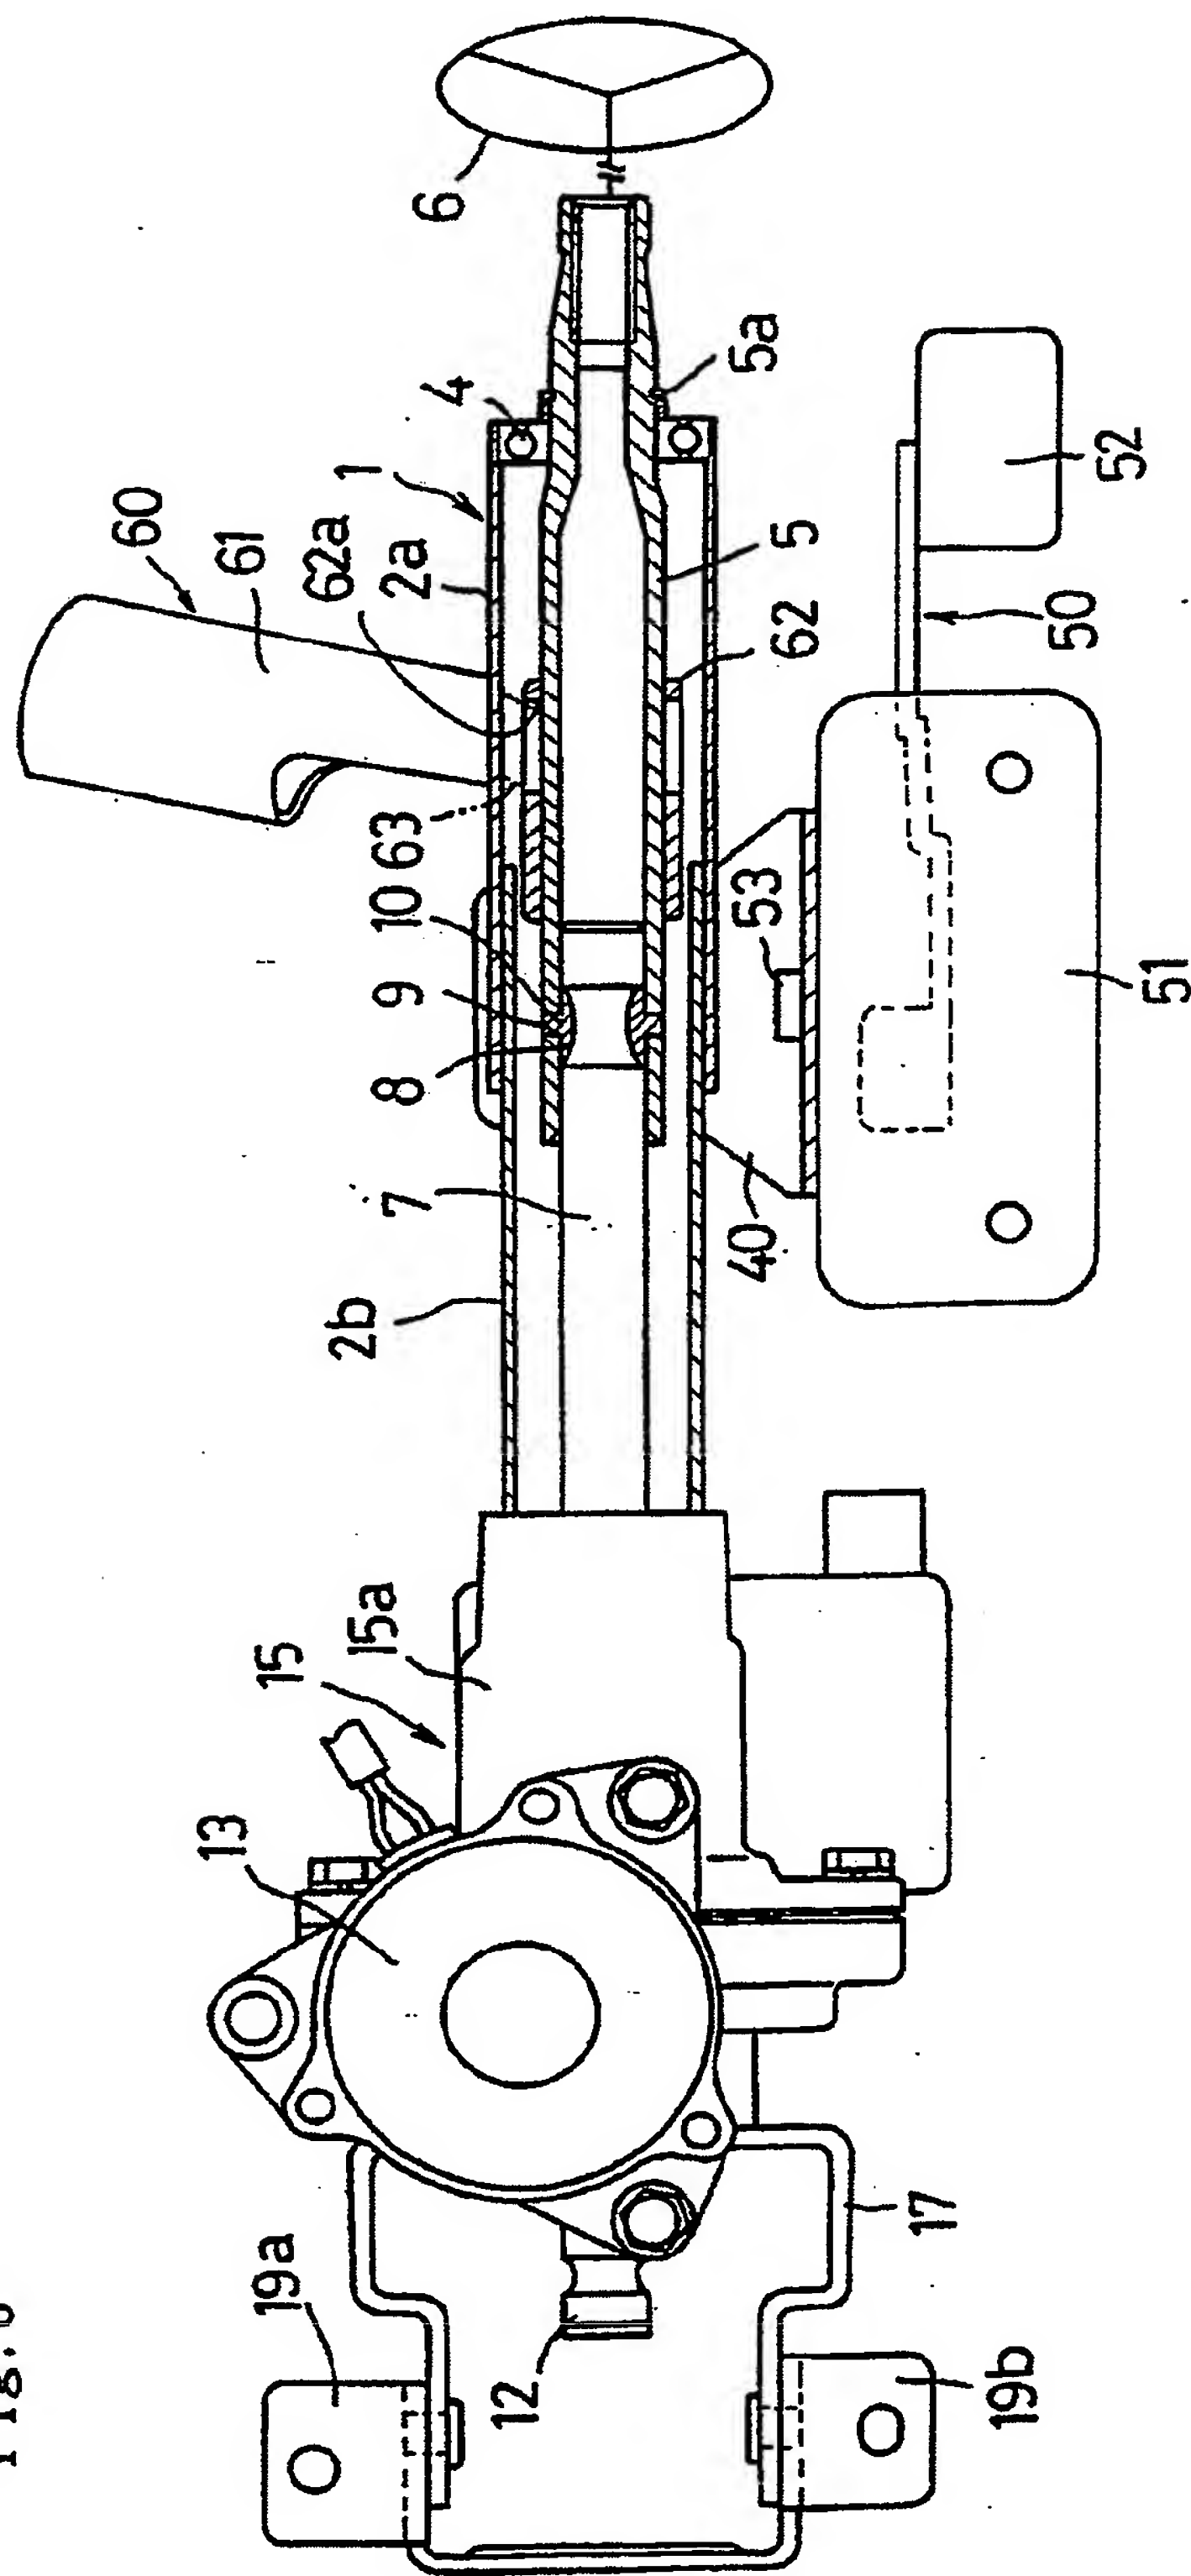


Fig. 4

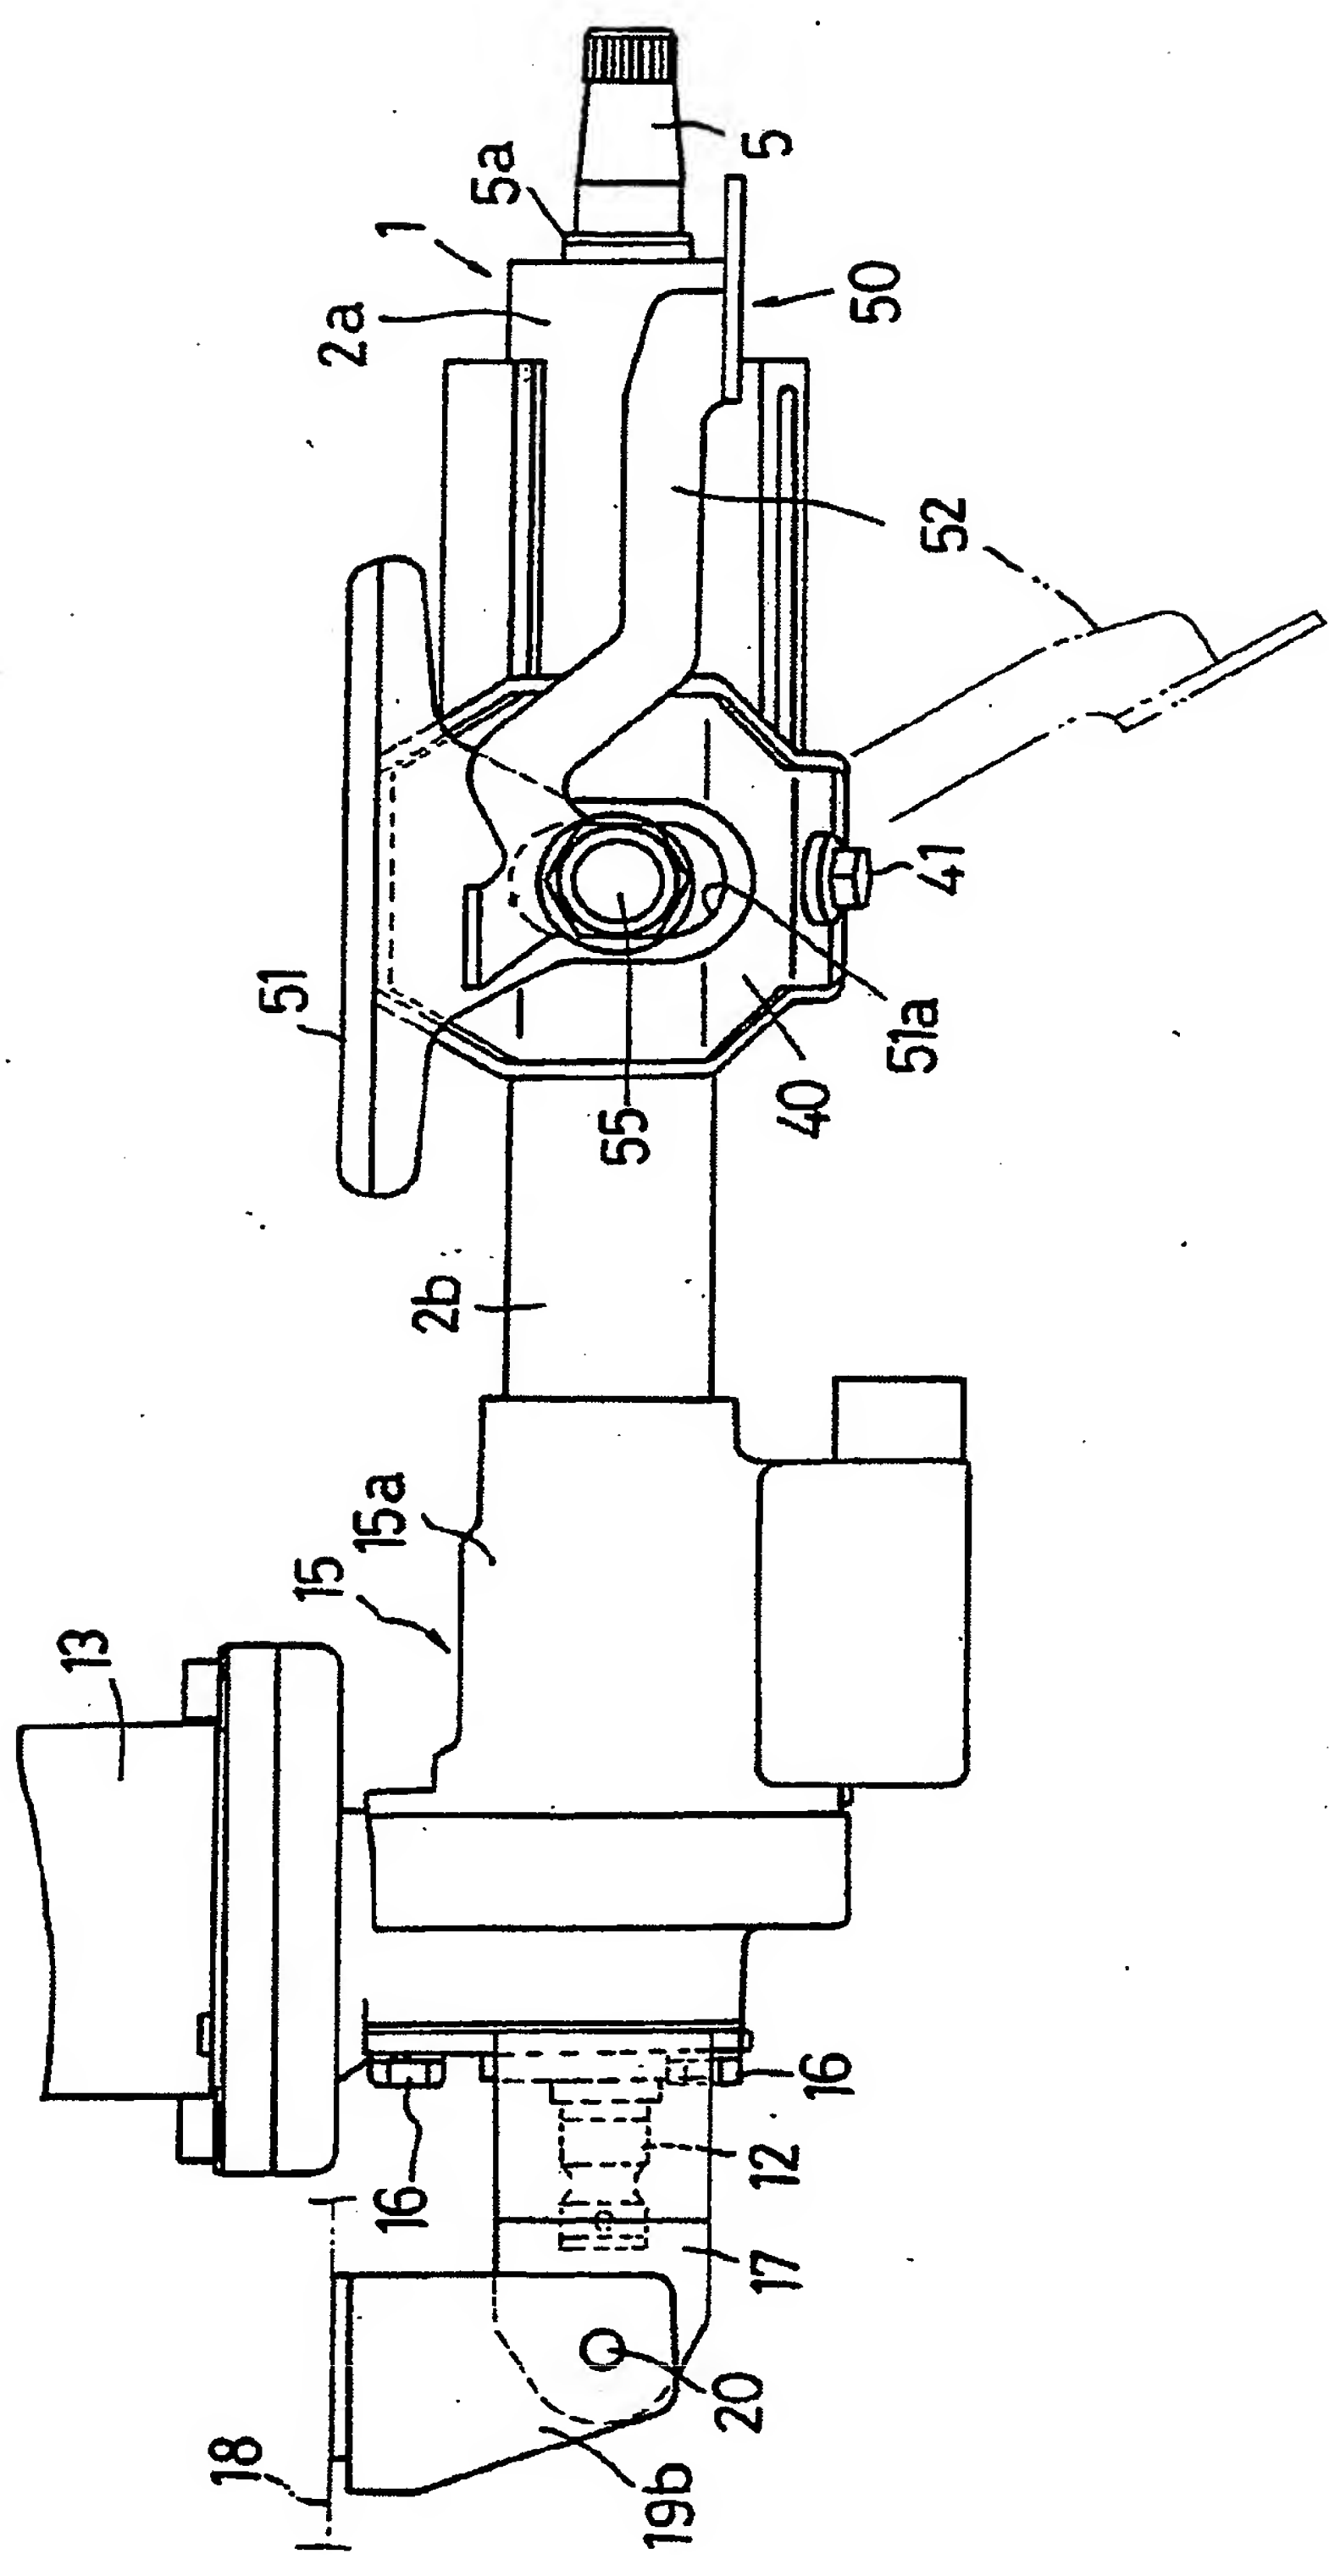


Fig. 5


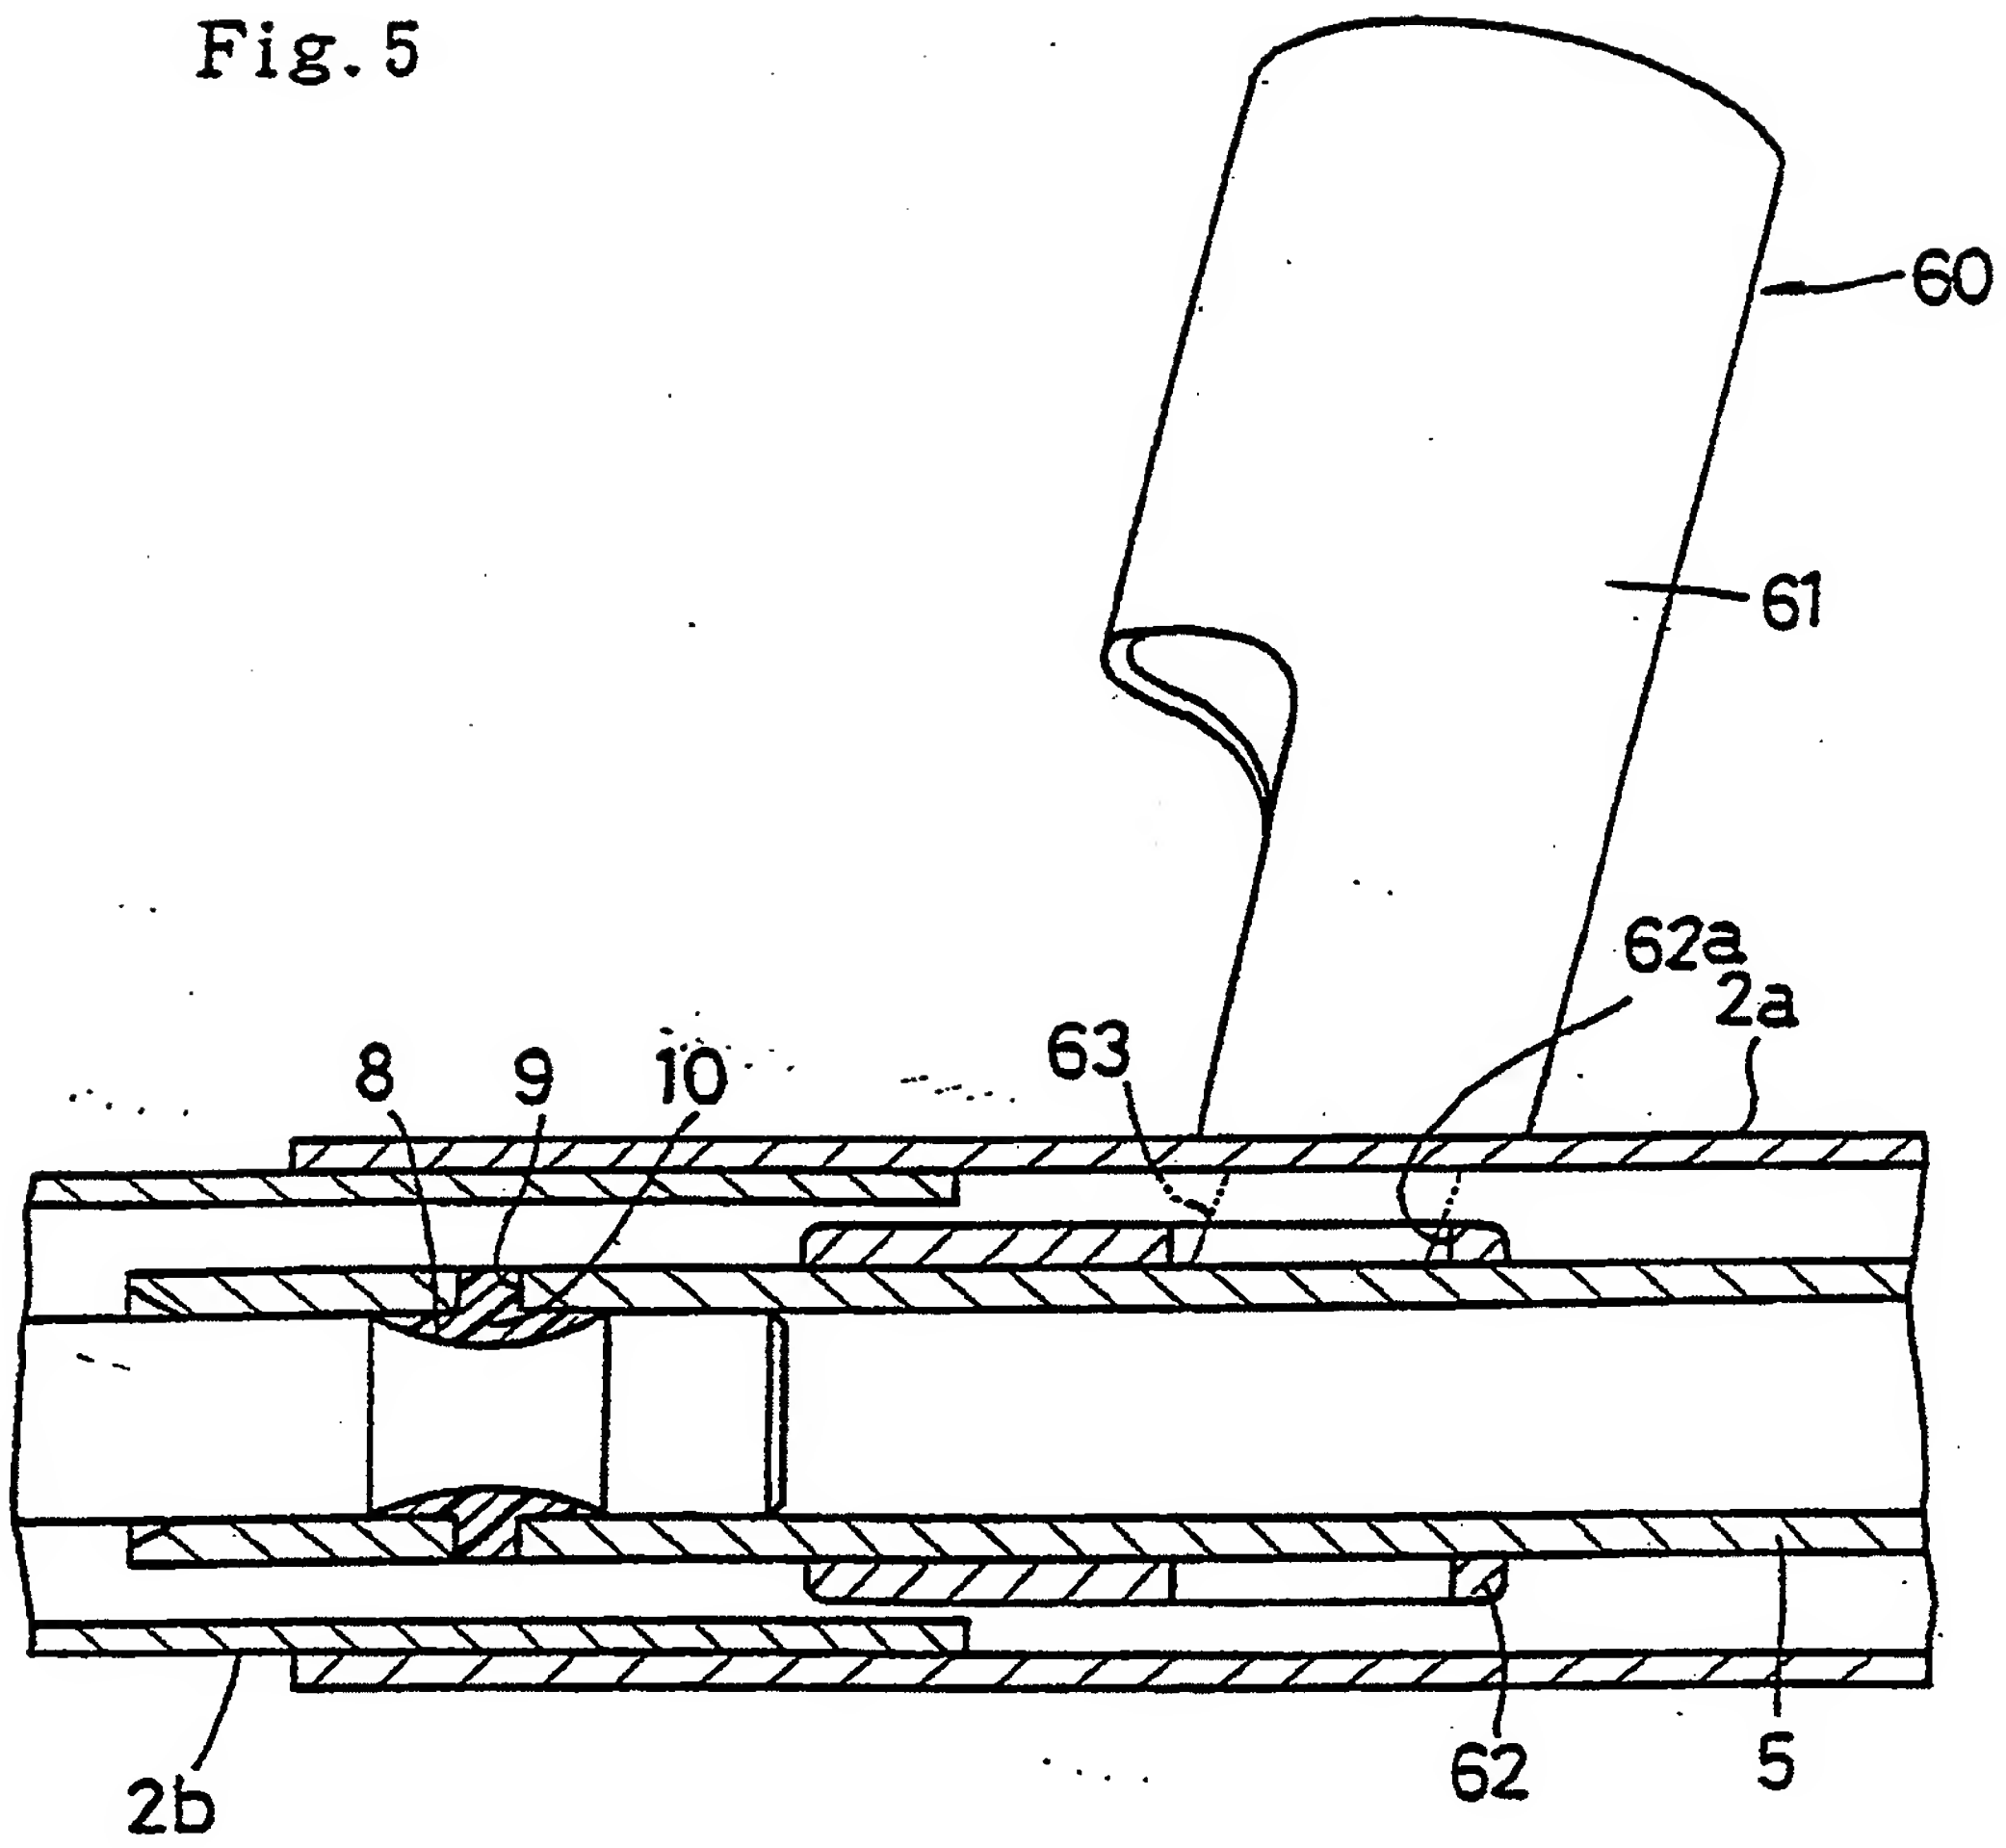


Fig. 6



(19)

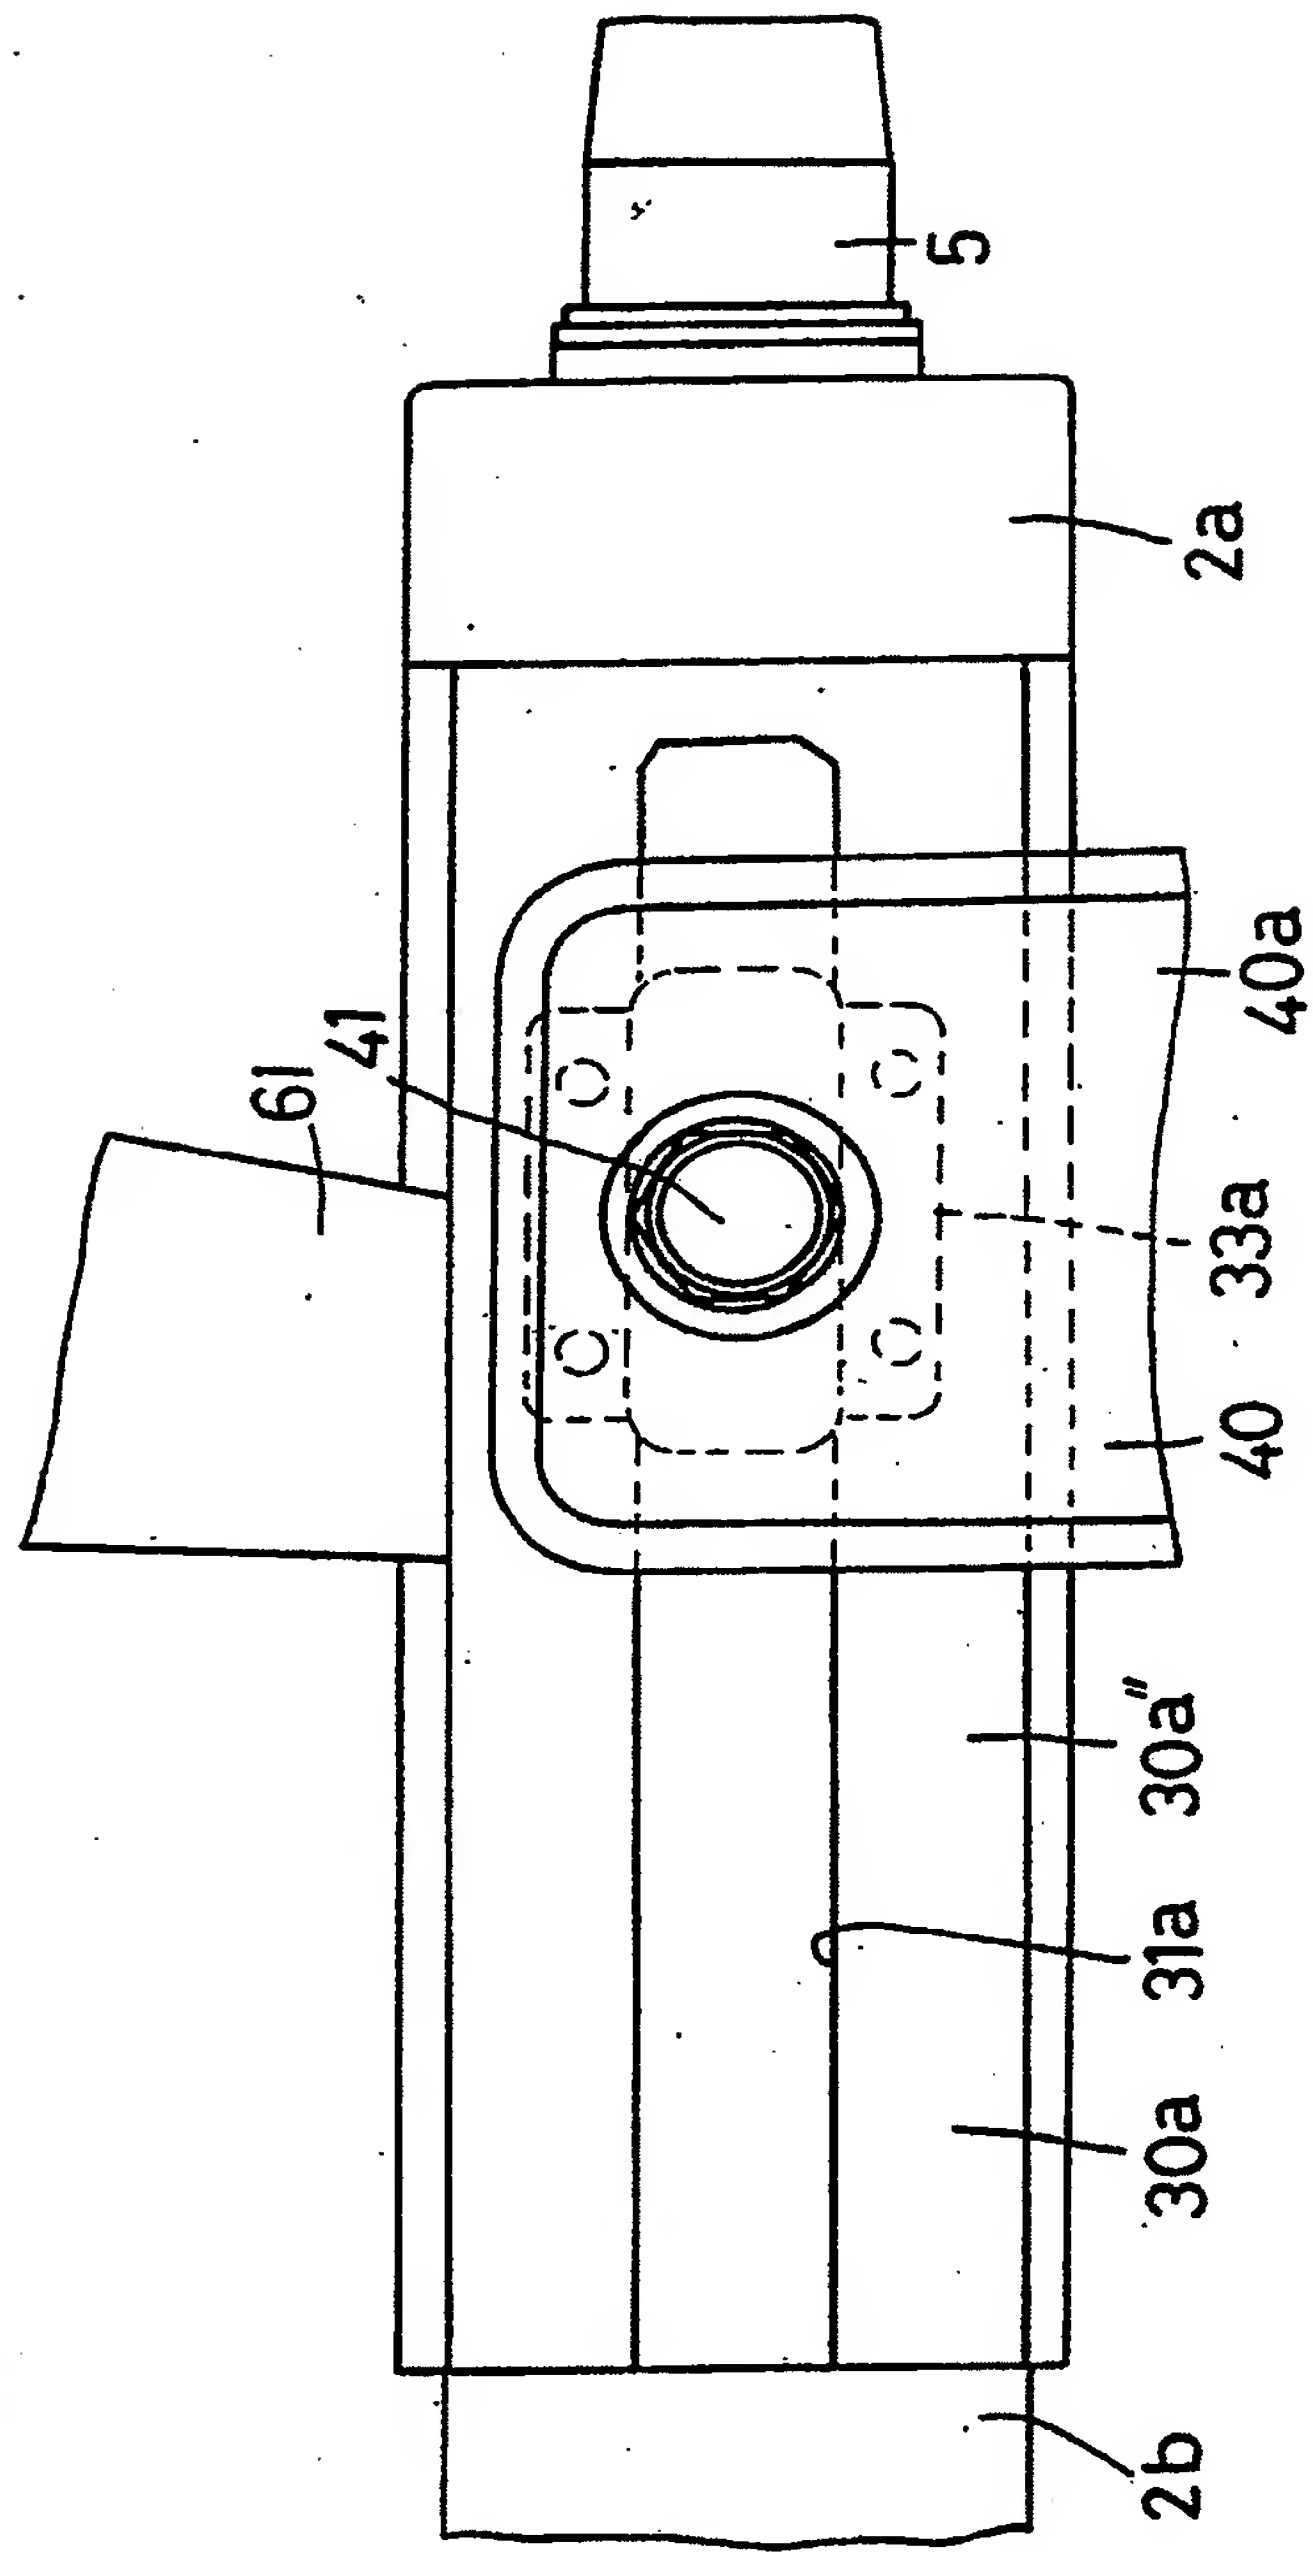

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 354 782 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
28.06.2006 Bulletin 2006/26

(51) Int Cl.:
B62D 1/19 (2006.01) **B62D 1/184** (2006.01)
B62D 1/187 (2006.01)

(43) Date of publication A2:
22.10.2003 Bulletin 2003/43

(21) Application number: **03015825.7**

(22) Date of filing: **09.03.1998**

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **14.03.1997 JP 8194797**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
98104171.8 / 0 864 481

(71) Applicant: **JTEKT Corporation**
Osaka-shi
Osaka
542-8502 (JP)

(72) Inventor: **Takabatake, Yoshikazu**
Chuo-Ku,
Osaka 542-8502 (JP)


(74) Representative: **Hering, Hartmut**
Patentanwälte
Berendt, Leyh & Hering
Innere Wiener Strasse 20
81667 München (DE)

(54) Shock absorbing steering device

(57) This is a shock absorbing steering device that provides the benefit of stable shock absorption in the event of a vehicle collision. A pair of connecting members (33a, 33b) connected through guide sections (30a", 30b") to a column (2a) that supports a steering shaft (5) is con-

nected to a vehicle member (18). This column (2a) is relatively movable in its axial direction with respect to the connecting members (33a, 33b) when force above a given level acts on the column (2a) along the axial direction. This column (2a) is arranged between the two connecting members (33a, 33b).

Fig. 1

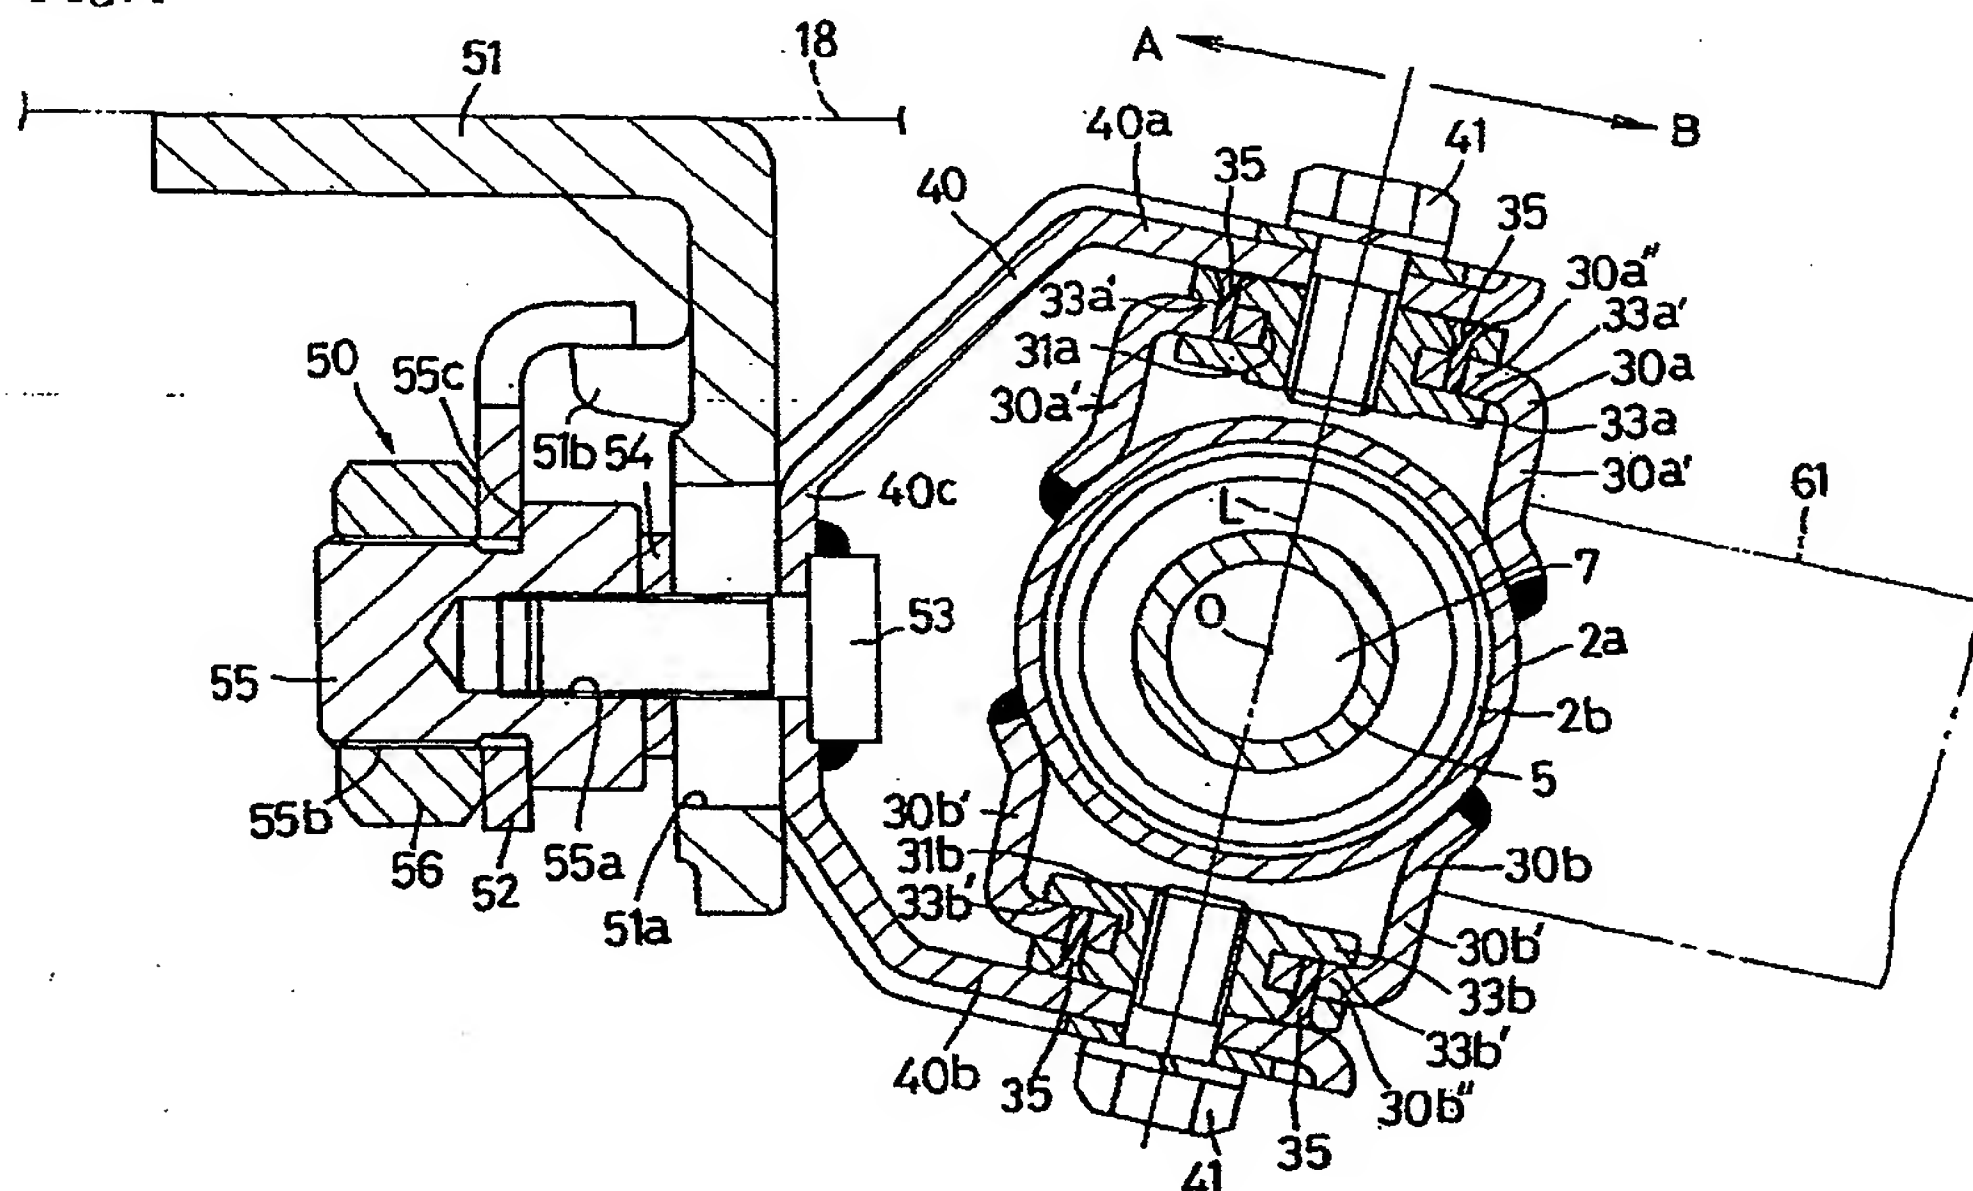



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 5825

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 4 241 937 A (DANNER EDWARD L ET AL) 30 December 1980 (1980-12-30) * column 2, line 11 - line 55 * * column 3, line 41 - line 45 * * figures 1,3 *	1	INV. B62D1/19 B62D1/184 B62D1/187
A	----- EP 0 755 844 A (LEMFORDER NACAM S.A) 29 January 1997 (1997-01-29) * column 5, line 33 - column 7, line 24; figures 1-6 *	1	
A	----- US 4 616 522 A (WHITE ET AL) 14 October 1986 (1986-10-14) * figures 1,3,6 *	1	
A	----- US 3 923 319 A (NONAKA MASAKATSU ET AL) 2 December 1975 (1975-12-02) * column 3, line 26 - line 47 * * column 4, line 40 - line 47 * * figures 1,8 *	1	
E	----- EP 0 849 141 A (ECIA - EQUIPEMENTS ET COMPOSANTS POUR L'INDUSTRIE AUTOMOBILE) 24 June 1998 (1998-06-24) * the whole document *	1	TECHNICAL FIELDS SEARCHED (IPC) B62D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 May 2006	Examiner Blondeau, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 5825

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-05-2006

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4241937	A	30-12-1980	CA 1138746 A1	04-01-1983
			DE 3004797 A1	09-10-1980
			FR 2452408 A1	24-10-1980
			GB 2046684 A	19-11-1980
			IT 1147034 B	19-11-1986
			JP 55127254 A	01-10-1980
			JP 62021657 B	13-05-1987
			SE 8002212 A	27-09-1980
EP 0755844	A	29-01-1997	DE 69616193 D1	29-11-2001
			DE 69616193 T2	14-03-2002
			ES 2162646 T3	01-01-2002
			FR 2737175 A1	31-01-1997
			US 5775172 A	07-07-1998
US 4616522	A	14-10-1986	NONE	
US 3923319	A	02-12-1975	DE 2431883 A1	30-01-1975
			GB 1472634 A	04-05-1977
			JP 1060719 C	25-08-1981
			JP 50024934 A	17-03-1975
			JP 56001277 B	12-01-1981
EP 0849141	A	24-06-1998	FR 2757472 A1	26-06-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

